



# D/I-ALV

## STANDARD PRODUCT SPECIFICATIONS

DIMENSION:

48"L x 14.52"W x 4.38"H

**Materials:**

Die-Formed Heavy Gauge Prepainted Cold-Rolled Steel Housing

**Finish:**

Powder Coated

**Lens:**

22 ga. Cold-Rolled Steel w/ 5/64" Diameter Micro Perforations at Staggered 7/64" Baffle w/ White Opal Acrylic Diffuser.

**Lamps:**

Lamps are Sold Separately

**Listing:**

Dry Listed

**Ballast Info:**


120 Volt Class P, 60 Hz. Electronic, Options Shown Below.

**Installation:**

Hardware is Included. Install by a Qualified Electrician.

**Warranty:**

1 Year Limited From Date of Shipment

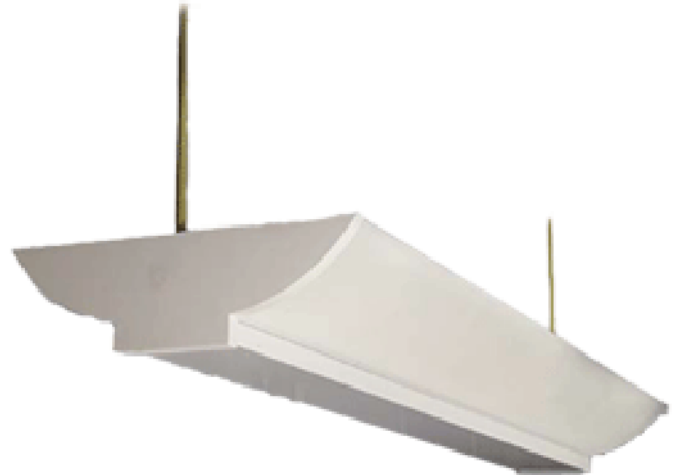

LAMPS SOLD SEPARATELY - ADD AS SEPARATE LINE ITEM  
SEE THE LAMPS SPECSHEET FOR ORDER CODES

**EXAMPLE: DL-D/I-ALV-WH-232EH-4-AC12**

MODEL	FINISH	WATTAGE	BALLAST	LENGTH	MOUNT	LENS/REFL	
D/I-ALV	WH White	232 2-F32 T8	EN Hybrid Electronic	4	4 Feet	ACXX Aircraft Cable PDXX Pendant  Replace XX With Desired Length of Mount	PER Perforated
	CC Custom Color		ER Residential Electronic	8	8 Feet		
			EH Commercial Electronic	12	12 Feet		
			16	16 Feet		<b>OPTIONS</b>	
			The 'EH' Ballast is Dual Voltage 120v/277v HPF	Runs available in increments of 4 feet		EM Emergency Ballast	