GARAGE LIGHTING GLL12



Standard Product Specifications

Materials: Cast Aluminum Housing Finish: Powder Coated Lens: Frosted Polycarbonate LED: Integrated LED Array Listing: Wet List to Meet UL 1598 Standard Driver Info: 120/277V Installation Information: Install by Qualified Electrician Warranty: 2 Years From Date of Shipment


DIMENSIONS: 11.42"Dia. x 4.49"H



REV 20223 1510 ACE



11.42".

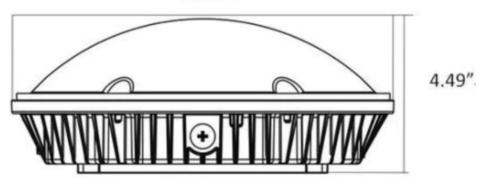

MODEL	FINISH	WATTAGE	KELVIN	OPTIONS
Model GLL12	Finish WH- White	Wattage LED30 - 30W LED 4200 Lms LED40 - 40W LED 5600 Lms LED60 - 60W LED 8400 Lms	<u>Kelvin</u> 30 - 30K 40 - 40K 50 - 50K	Options DIM - 0-10V Dimmable MOT - Motion Sensing PMXX - Pendant Mount Replace XX with Pendant Length in Inches
Divine Lighting Fabrication & Powder Coating, LLC. Conroe, TX		http://www.divinelighting.net customerservice@divinelighting.net		PH: 936-494-3900 FX: 936-494-3910

As led performance and lumen output becomes more efficient, specifications are subject to change without notice