


Standard Product Specifications

Materials: Aluminum Housing Finish: Powder Coated Lens: White Polycarbonate LED: Integrated LED Array Listing: Wet List to Meet UL 1598 Standard Driver Info: 120V Installation Information: Install by Qualified Electrician Warranty: 2 Years From Date of Shipment

DIMENSIONS: 7"W x 4"H x 3.5"E **2.5" Top Extension**



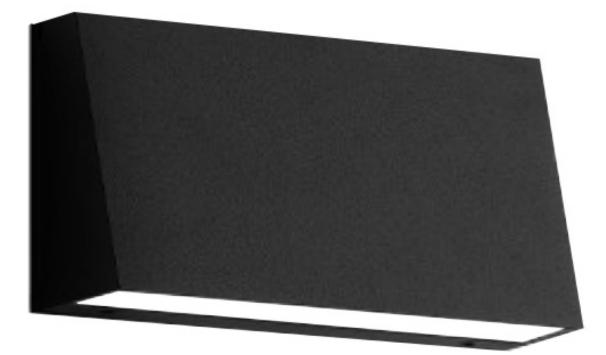

MODEL	FINISH	WATTAGE	KELVIN	OPTIONS
<u>Model</u> RDLSL	Finish DB - Dark Bronze BL - Black AS - Anodized Silver WH- White CC - Custom Color	Wattage LED5 - 5W LED 500 Lms	<u>Kelvin</u> 30 - 30K 35 - 35K 40 - 40K 50 - 50K	Options DV - Dual Volt 120/277V DIM - 0-10V Dimmable EM5 - 500 Lms Emergency
Divine Lighting Fabrication & Powder Coating, LLC.		http://www.divinelighting.net		PH: 936-494-3900
Conroe, TX		customerservice@divinelighting.net		FX: 936-494-3910

As led performance and lumen output becomes more efficient, specifications are subject to change without notice