

**CEILING FLUSH**  
**1010/1010E/1010X**

Standard Product Specifications

**Materials:**

20ga. Galvanized Steel Pan

**Finish:**

Standard Finish is Galvanized; Standard for E and X is White (Pan Only)

**Lens:**

Acrylic and Polycarbonate Options

**LED:**

Integrated LED Array

**Listing:**

Damp List to Meet UL 1598 Standard

**Driver Info:**

120V

**Installation Information:**

Install by Qualified Electrician

**Warranty:**


2 Years From Date of Shipment

**DIMENSIONS:**

**1010** - 10”Sq. x 4.25”D

**1010E** - 10”Sq. x 4.75”D


**1010X** - 10”Sq. x 5.5”D

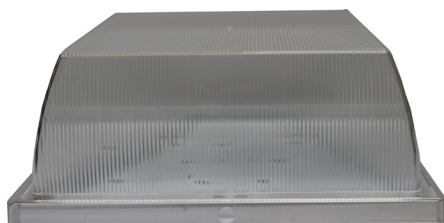

**1010**




**1010E**

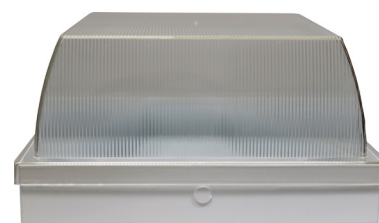

**1010X**



**1010 (SHOWN WITH WHITE LENS)**

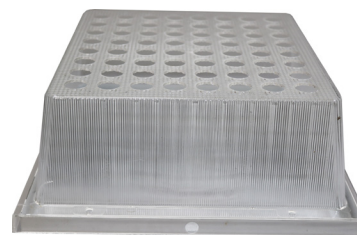

**1010 (SHOWN WITH BUG LENS)\***

\*Minimum Quantity Required for Bug Lens

**ORDER INFORMATION**

Call Factory for Fluorescent Options and Minimum Ordering Requirements

| MODEL                                  | FINISH   | WATTAGE  | KELVIN  | LENS  | OPTIONS  |
|--|--|--|---|---|--|
| <b>Model</b><br>1010<br>1010E<br>1010X | <b>Finish</b><br>DB - Dark Bronze<br>BL - Black<br>AS - Anodized Silver<br>WH - White<br>CC - Custom Color | <b>Wattage</b><br>LED15 - 15W LED 1600 Lms<br>LED20 - 20W LED 2200 Lms | <b>Kelvin</b><br>30 - 30K<br>35 - 35K<br>40 - 40K<br>50 - 50K | <b>Lens</b><br>WA - White Acrylic<br>CA - Clear Acrylic<br>WP - White Polycarbonate<br>CP - Clear Polycarbonate | <b>Options</b><br>DV - Dual Volt 120/277V<br>DIM - 0-10V Dimmable<br>EM5 - 500 Lms Emergency<br>EM12 - 1200 Lms Emergency<br>BUG - Bug Lens*<br>*Minimum Quantity Required<br>- Call Factory for Minimum<br>Ordering Requirements. |