

Standard Product Specifications

Materials:

Aluminum Housing

Finish:

Powder Coated

Lens:

White Polycarbonate

LED:

Integrated LED Array

Listing:

Wet List to Meet UL 1598 Standard

Driver Info:

120V

Installation Information:

Install by Qualified Electrician

Warranty:


2 Years From Date of Shipment

DIMENSIONS:

Pattern 1 - 11”Sq. Top

Pattern 2 - 9.25”Sq. Top

36”H Standard (Custom Heights Available)

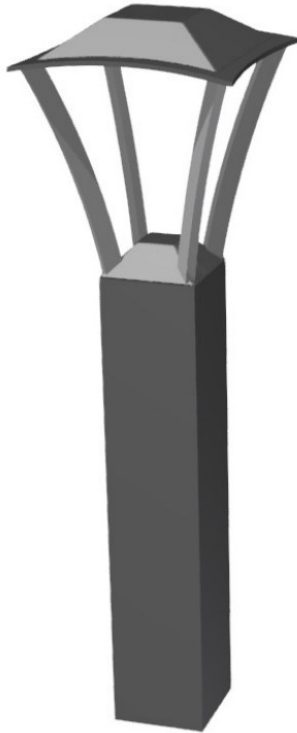

PATTERN 1



PATTERN 2

MODEL	FINISH	WATTAGE	KELVIN	HEIGHT	OPTIONS
Model BOL023S - 1 BOL023S - 2 Choose Pattern Number	Finish DB - Dark Bronze BL - Black AS - Anodized Silver WH - White CC - Custom Color	Wattage LED20 - 20W LED 2000 Lms	Kelvin 30 - 30K 35 - 35K 40 - 40K 50 - 50K	Height 36 - 36”H (Standard) XX - Custom Height in Inches	Options DV - Dual Volt 120/277V DIM - 0-10V Dimmable PC - Photocell EM5 - 500 Lms Emergency EM12 - 1200 Lms Emergency