



Standard Product Specifications

Materials:
Aluminum Housing
Finish:
Powder Coated
Lens:
White Acrylic
LED:
Integrated LED Array


Listing:
Wet List to Meet UL 1598 Standard
Driver Info:
120V
Installation Information:
Install by Qualified Electrician
Warranty:
2 Years From Date of Shipment

DIMENSIONS:
6" Dia. x 42"H
6" Dia. x 22"H

(Custom Bollard and Lens Heights Available)

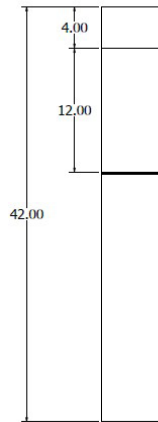

(Approximate Dimensions)

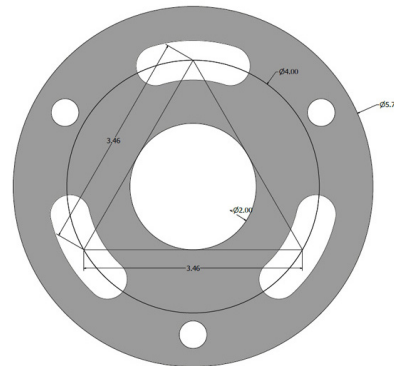

(Mounting Base)

MODEL	FINISH	WATTAGE	KELVIN	BOLLARD HEIGHT	LENS HEIGHT	OPTIONS
Model BOL043	Finish DB - Dark Bronze BL - Black AS - Anodized Silver WH - White CC - Custom Color	Wattage LED25 - 25W LED 2500 Lms	Kelvin 30 - 30K 35 - 35K 40 - 40K 50 - 50K	Bollard Height 42 - 42"H 22 - 22"H XX - Custom Height in Inches	Lens Height 9 - 9" Lens Height 14 - 14" Lens Height* *Standard Height	Options DV - Dual Volt 120/277V DIM - 0-10V Dimmable PC - Photocell EM5 - 500 Lms Emergency EM12 - 1200 Lms Emergency