



## **Standard Product Specifications**

**Materials:** 

**Aluminum Housing** 

Finish:

Powder Coated

Lens:

White Acrylic

LED:

Integrated LED Array

Listing:

Wet List to Meet UL 1598 Standard

**Driver Info:** 

120/277V

**Installation Information:** 

Install by Qualified Electrician

Warranty:

2 Years From Date of Shipment


**DIMENSIONS:** 


6.625"Dia. x 40"

6.625"Dia. x 78"





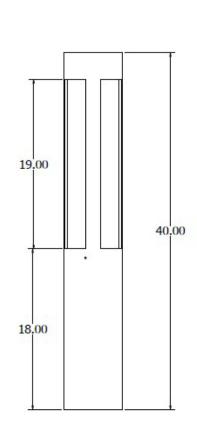

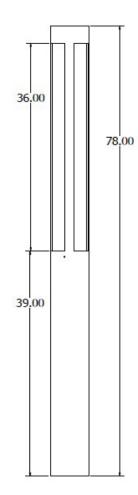

MODEL	FINISH	WATTAGE	KELVIN	OPTIONS
Model BOLCLMN40 BOLCLMN78	Finish DB - Dark Bronze BL - Black AS - Anodized Silver WH- White CC - Custom Color	Wattage (BOLCLMN 40") LED15 -15W LED 1500 Lms Wattage (BOLCLMN 78") LED25 - 25W LED 2500 Lms	<b>Kelvin 30</b> - 30K <b>35</b> - 35K <b>40</b> - 40K <b>50</b> - 50K	Options PC - Photocell EM5 - 500 Lms Emergency EM12 - 1200 Lms Emergency