

Standard Product Specifications

Materials:

Aluminum Housing

Finish:

Powder Coated

Lens:

White Acrylic

LED:

Integrated LED Array

Listing:

Wet List to Meet UL 1598 Standard

Driver Info:

120/277V

Installation Information:

Install by Qualified Electrician

Warranty:

2 Years From Date of Shipment


DIMENSIONS:

Standard - 5”Sq. x 36”H (12” Window)

Squatty - 6”Sq. x 10”H (2” Window)



STANDARD

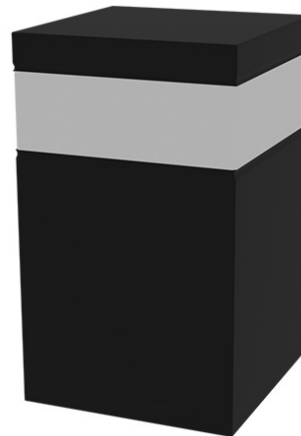

SQUATTY

| MODEL | FINISH | WATTAGE | KELVIN | HEIGHT | OPTIONS |
|-------------------------|--|--|---|--|--|
| Model BOLSQLW | Finish DB - Dark Bronze BL - Black AS - Anodized Silver WH - White CC - Custom Color | Wattage(10") LED10 - 10W LED 1080 Lms Wattage(36") LED22 - 22W LED 2744 Lms LED40 - 40W LED 4000 Lms | Kelvin 30 - 30K 35 - 35K 40 - 40K 50 - 50K | Height 10 - 10”H 36 - 36”H XX - Custom Height *Replace XX with Height in Inches | Options DIM - 0-10V Dimmable PC - Photocell HSS90 - 90 Degree House Side Shield HSS180 - 180 Degree House Side Shield EM5 - 500 Lms Emergency* EM12 - 1200 Lms Emergency* <i>*Available in 36”H only</i> |