

Standard Product Specifications

**Materials:**

20ga. G90 Steel Frame

**Finish:**

Powder Coated

**Lens:**

Polycarbonate Options

**LED:**

Integrated LED Array

**Listing:**

Damp List to Meet UL 1598 Standard

**Driver Info:**

120V

**Installation Information:**

Install by Qualified Electrician

**Warranty:**

2 Years From Date of Shipment

**DIMENSIONS:**

**D1010** - 10.5”Sq. x 5”D

**D1010E** - 10.5”Sq. x 5.5”D

**D1010X** - 10.5”Sq. x 6.15”D



PATTERN 1




PER



PERB



PATTERN 15

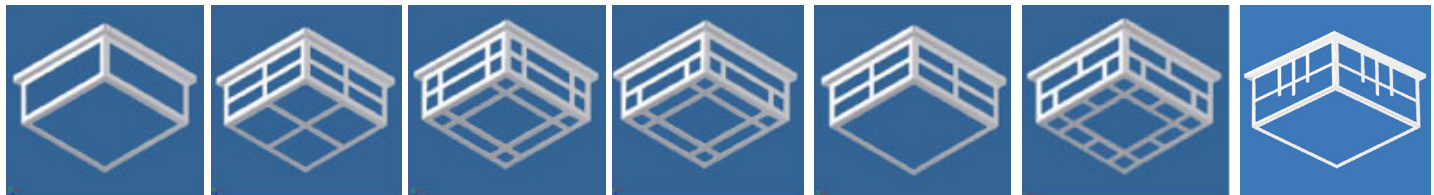

0

2

4

5

7

9

10

MODEL	PATTERN	FINISH	WATTAGE	KELVIN	LENS	OPTIONS
<b>Model</b> D1010 D1010E D1010X	<b>Pattern</b> # - Pattern # (Patterns Shown Above)	<b>Finish</b> DB - Dark Bronze BL - Black AS - Anodized Silver WH - White CC - Custom Color	<b>Wattage</b> LED16 - 16W LED 1600 Lms LED20 - 20W LED 2000 Lms	<b>Kelvin</b> 30 - 30K 35 - 35K 40 - 40K 50 - 50K	<b>Lens</b> WP - White Polycarbonate CP - Clear Polycarbonate	<b>Options</b> DV - Dual Volt 120/277V PC - Photocell BUG - Bug Lens GSK - Bug Gasket