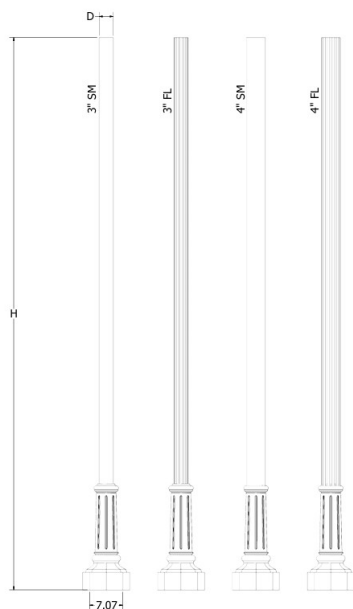


**CONSTRUCTION**

Designed, Engineered, and Manufactured in Texas Meets BAA & BABA Standards

Pole Shaft:

Pole shaft is fabricated from **seamless extruded 6063-T6 aluminum alloy** and designed for decorative area and site lighting applications.

Base:

Manufactured from 6061 aluminum alloy plate, providing superior structural integrity and corrosion resistance.

Anchor Bolts:

(4) Hot-dip galvanized steel anchor bolts conforming to ASTM F1554 Grade 55 requirements with a minimum yield strength of 55,000 psi are provided. Bolts are 1/2" x 12" long. (2) washers and (2) nuts are provided per bolt.

Finishes:

All aluminum components receive a multi-stage chemical pretreatment process for enhanced corrosion resistance and coating adhesion, followed by a durable TGIC polyester powder coat finish. Finishes are applied in-house utilizing state-of-the-art powder coating equipment. Standard colors include Dark Bronze, Black, Anodized Silver, and White. Custom colors and finishes are available upon request. Faux Wood Grain Finish Option Available. Optional primer coat available for extreme environmental conditions.



1/2 x 12"

INSTALLATION

Installation by qualified electrician.

WARRANTY**Standard Warranty:**

2-Year Limited Warranty covering defects in materials and workmanship.

Extended Warranty Options:

5-Year and 7-Year extended warranty programs available for increased long-term coverage (Finish Only).


ORDERING GUIDE

MODEL	SHAFT SIZE	HEIGHT	SHAFT PROFILE	OPTIONS	PRIMER	FINISH
Model POLE-DECO-RAP (Round Aluminum Anchor Plate w/ Decorative Base)	Shaft 3 - 3" RD 4 - 4" RD	Height 10' 12' 15' 18' 20' 25' 30'	Shaft Profile FL - Fluted SM - Smooth	Options 190 - (1) 90 Degree Hole 2180 - (2) 180 Degree Holes GFCI - GFCI Receptacle GFCILOCK - GFCI Lock TENON 2 3/8 x 3 EYE - Eye Hooks	Primer(Optional) P - Primer Coat (Recommended for Coastal Environments)	Finish DB - Dark Bronze BL - Black AS - Anodized Silver WH - White CC - Custom Color WGF - Faux Wood Grain Finish

Customer is responsible for providing **fully dimensioned drill patterns when using heads from other manufacturers; otherwise, the standard Divine Lighting drill pattern will be used.

Customer must **specify the orientation of fixtures on the pole when ordering. This information can be found in the options section, e.g. 190, 2180, etc.

**Divine Lighting is not responsible for inconsistencies between poles, fixtures, and parts produced by different manufacturers, and cannot guarantee proper fitting between such components.

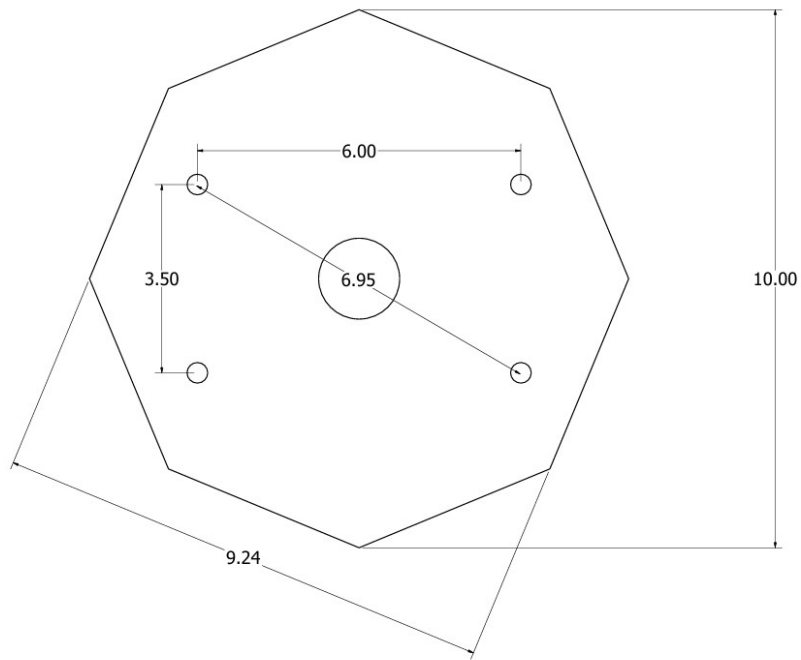

Pole Template

Pole shaft is fabricated from **seamless extruded 6063-T6 aluminum alloy** and designed for decorative area and site lighting applications.

All welds are ground smooth and blended to provide a clean architectural appearance.

All exposed hardware shall be stainless steel.