

POST TOPS
PSQ SERIES

Standard Product Specifications

Materials:

20ga. G90 Galvanized Steel Pan and Frame

Finish:

Powder Coated

Lens:

White Acrylic

LED:

Integrated LED Array

Listing:

Wet List to Meet UL 1598 Standard

Driver Info:

120V

Installation Information:

Install by Qualified Electrician

Warranty:

2 Years From Date of Shipment

DIMENSIONS:

PSQ1216 - 12”Sq. x 16”H

PSQ1824 - 18”Sq. x 24”H

PSQ2436 - 24”Sq. x 36”H

(Custom Sizes Available - Call Customer Service)




Pattern 15



Pattern 16



TX Pattern

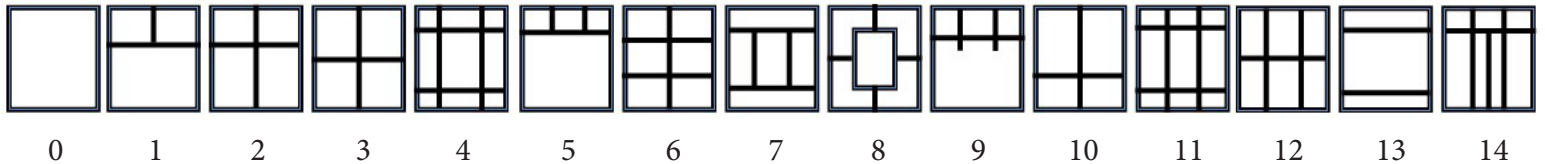

MODEL	PATTERN	FINISH	WATTAGE	KELVIN	ROOF STYLE	OPTIONS
Model PSQ1216 PSQ1824 PSQ2436 PSQXX Replace XX with Sq. and Height in Inches	Pattern # - Pattern #	Finish DB - Dark Bronze BL - Black AS - Anodized Silver WH - White CC - Custom Color	Wattage(PSQ1216) LED20 - 20W LED 2000 Lms LED45 - 45W LED 4500 Lms Wattage(PSQ1824) LED30 - 30W LED 3000 Lms LED60 - 60W LED 6000 Lms Wattage(PSQ2436) LED40 - 40W LED 4000 Lms LED60 - 60W LED 6000 Lms LED100 - 100W LED 10000 Lms	Kelvin 30 - 30K 35 - 35K 40 - 40K 50 - 50K	Roof Style FT - Flat Top RT - Roof Top	Options DV - Dual Volt 120/277V DIM - 0-10V Dimmable