# SOLA

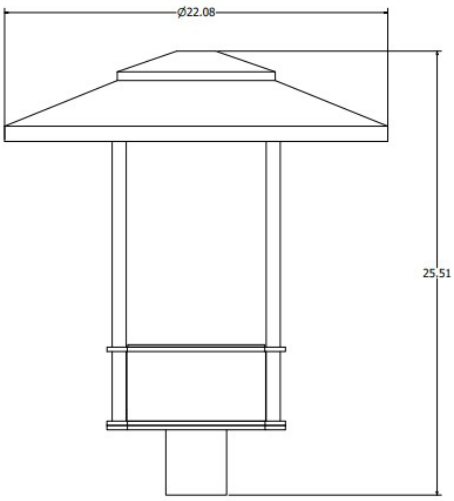


## SPECIFICATIONS

**Mounts on 3” Pole/Tenon**
**Height:** 22"
**Diameter:** 26"
**Weight:** 18 lbs.

**Decorative Area & Site Luminaire**
**Architectural Outdoor Lighting Solution**

## PERFORMANCE

**Delivered Lumens:**
3,000 – 15,000 lumens (depending on configuration)
**Wattage:**
20W – 100W LED System
**Color Characteristics:**
CCT: 3000K / 3500K / 4000K / 5000K
CRI: ≥80 standard
**Optics:**
Type V

## ELECTRICAL

**Input Voltage:**
120–277V
**Dimming:**
0–10V (DIM Option)
**LEDs:**
High-efficacy LEDs mounted to metal-core circuit boards for optimized thermal management.

## CONSTRUCTION

**Housing:**
Spun Aluminum Housing with nominal wall thickness of 0.100”
*All aluminum components are manufactuered from corrosion-resistant alloys suitable for outdoor architectural environments.
**Finish:**
Corrosion-resistant Super Durable Powder Coat Finish
**Lens:**
Clear Flat Glass
**LED Source:**
Integrated LED Array

## INSTALLATION

Installation by qualified electrician.

## LISTINGS

ETL Listed for Wet Locations.
Conforms to UL 1598 and CSA standards.

## WARRANTY

Standard 2-Year Limited Warranty
Optional 5-Year and 7-Year Extended Warranties Available
Note: Specifications subject to change without notice. Actual performance may vary depending on installation environment and operating conditions.

## ORDERING GUIDE

| MODEL | FINISH | PERFORMANCE | KELVIN | TYPE | OPTIONS |
|---|---|---|---|---|---|
| | | | | | |
| **Model**<br>**SOLA** | **Finish**<br>**DB** - Dark Bronze<br>**BL** - Black<br>**AS** - Anodized Silver<br>**WH**- White<br>**CC** - Custom Color | **Performance**<br>**LED30** - 20W LED 3000 Lms<br>**LED40** - 28W LED 4000 Lms<br>**LED50** - 40W LED 5400 Lms<br>**LED70** - 50W LED 7000 Lms<br>**LED100** - 60W LED 10000 Lms<br>**LED150** - 100W LED 15000 Lms | **Kelvin**<br>**30** - 30K<br>**35** - 35K<br>**40** - 40K<br>**50** - 50K | **Type**<br>**V** - Type V | **Options**<br>**5Y** - 5 Year Warranty<br>**7Y** - 7 Year Warranty<br>**S90** - 90 Degree Shield<br>**S180** - 180 Degree Shield |