Divine Lighting
FABRICATION & POWDER COATING LLC

Standard Product Specifications

Materials:
Die-Cast Aluminum
Finish:
Powder Coated
Lens:
Polycarbonate Options
LED:
Integrated LED Array

Listing:
Wet List to Meet UL 1598 Standard
Driver Info:
120V
Installation Information:
Install by Qualified Electrician
Warranty:
2 Years From Date of Shipment

DIMENSIONS:
Top Diameter: 5.8"
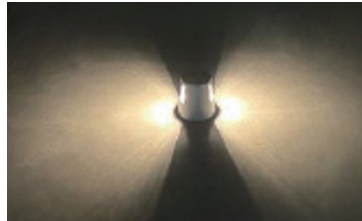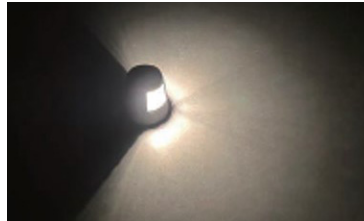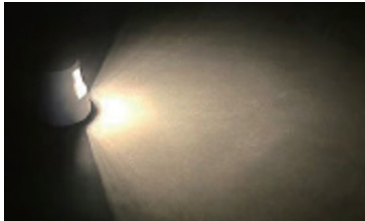**Bottom Diameter:** 7.75"
Height: 8"

STMP056A
1@90

STMP056B
2@90

STMP056C
2@180

STMP056D
4@90

MODEL	FINISH	WATTAGE	KELVIN	LENS	OPTIONS
Model STMP056A STMP056B STMP056C STMP056D	**Finish** **DB** - Dark Bronze **BL** - Black **AS** - Anodized Silver **WH**- White **CC** - Custom Color	**Wattage** **LED10** - 10W LED 1000 Lms **LED15** - 15W LED 1500 Lms **LED20** - 20W LED 2000 Lms	**Kelvin** **30** - 30K **40** - 40K **50** - 50K	**Lens** **CP** - Clear Polycarbonate **WP** - White Polycarbonate	**Options** **DV** - Dual Volt 120/277V

As led performance and lumen output becomes more efficient, specifications are subject to change without notice

112624 1120 ACE