

Standard Product Specifications


Materials:
Cast Aluminum Housing
Finish:
Powder Coated
Lens:
Flat Clear Glass on Bottom
Molded Oval Glass on Top
LED:
Integrated LED Array

Listing:
Wet List to Meet UL 1598 Standard
Driver Info:
120/277V
Installation Information:
Install by Qualified Electrician
Warranty:
2 Years From Date of Shipment

DIMENSIONS:
18"W x 7.125"H x 9.125"E



WP36 (Up/Down Light)

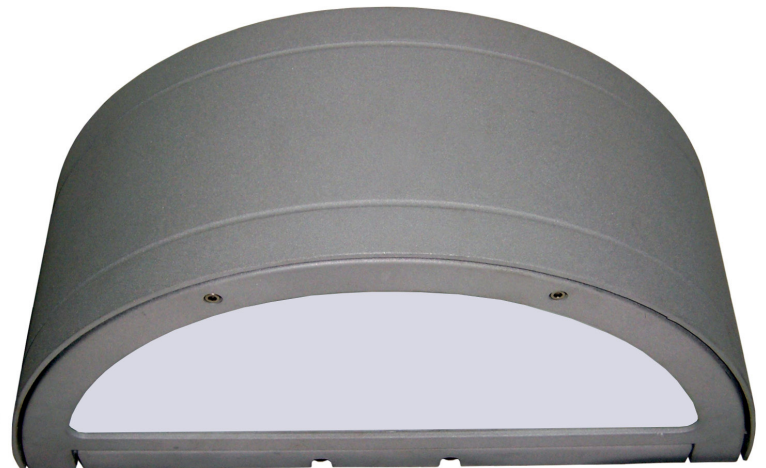

WP35(Down Light Only)

MODEL	FINISH	WATTAGE	KELVIN	OPTIONS
Model WP35 WP36	Finish DB - Dark Bronze (Standard) BL - Black AS - Anodized Silver WH- White CC - Custom Color	Wattage (WP35) LED25 - 25W LED 2450 Lms LED36 - 36W LED 3600 Lms Wattage (WP36) LED36 - 36W LED 3600 Lms LED45 - 45W LED 4500 Lms	Kelvin 30 - 30K 40 - 40K 50 - 50K	Options DIM0-10V - 0-10V Dimmable MOT - Motion Sensor EM5 - 500Lms Emergency EM12 - 1200Lms Emergency PC - Photocell DV - 120/277 Dual Volt