

Standard Product Specifications

Materials:
Steel / Aluminum
Finish:
Powder Coated
Anchor Bolts:
See Chart
Template:
Provided

Hand Hole:
Standard on Poles 10' and Taller
Base Cover:
Standard on all Poles
Round Base Covers Available
Listing:
Wet List to Meet UL 1598 Standard
Installation Information:
Install by Qualified Electrician

DIMENSIONS:

RSP - Base 10" SSP - Base 10" (4")
Shaft - 3 or 4" SSP - Base 12" (5")
Shaft - 4"sq. or 5"sq




Anchor Bolts
includes (4) black iron bolts
w/ 2 nuts and 2 washers each

5/18" x 18"
3"RSP up to 15'

3/4" x 30"
4"RSP 21'-25'
4"SSP over 25'

3/4" x 18"
3"RSP 16'-20'
4"SSP up to 25"


1" x 36"
5"SSP over 20'

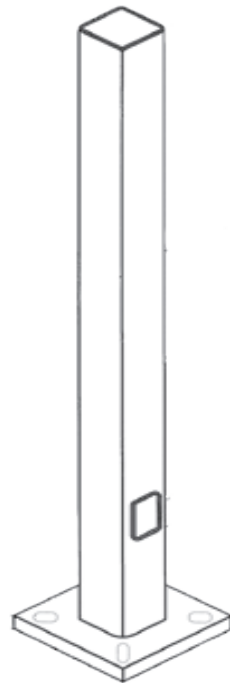


Tenon



Hand Hole Cover



Top Cover




GFCI



3" 2 3/8 Adapter



Base Cover



Eye Hooks

MODEL	SHAFT	SCHEDULE/GAUGE	HEIGHT	OPTIONS	FINISH
Model POLE-RSP - Round Steel Anchor Plate POLE-DB-RSP - Round Steel Direct Bury	Shaft 3 - 3"OD 4 - 4"OD 5 - 5"OD 6 - 6"OD	Schedule/Gauge 40 - Schedule 40	Height 8 - 8ft 10 - 10ft 12 - 12ft 15 - 15ft 18 - 18ft 20 - 20ft 25 - 25ft 30 - 30ft XX - Custom Height	Options 190 - (1)90 Deg Hole 290 - (2)90 Deg Hole 390 - (3)90 Deg Hole 490 - (4)90 Deg Hole 280 - (2)180 Deg Hole GFCI - GFCI Recepticle GFCILOCK - GFCI Lock TENON23/8x3 TENON27/8x3 EYE - Eye Hooks	Finish DB - Dark Bronze BL - Black AS - Anodized Silver WH - White CC - Custom Color
POLE-SSP - Square Steel Anchor Plate POLE-DB-SSP - Square Steel Direct Bury	4 - 4" (Square) 5 - 5" (Square)	7 - 7 Gauge 11 - 11 Gauge	See Heights Above	See Options Above	See Finishes Above
POLE-RAP - Round Aluminum POLE-DB-RAP - Round Aluminum Direct Bury	3 - 3"OD 4 - 4"OD	.125 - Gauge 40 - Schedule 40	See Heights Above	See Options Above SM - Smooth FL - Fluted* *.125 gauge only	See Finishes Above